

Argus Autronic II

Fabricant (si # de la marque) :		Pays de fabrication :	Etats-Unis
Début de fabrication :	1962	Fin de fabrication :	1965
Rareté :	Rare	Page du McKeown :	74
Type d'appareil :	Compact		

Film

Type de film :	135	Nombre maxi de vues :	36
Format :	24 x 36 mm	Format :	
Format :		Format :	
Avancement :	Levier	Position :	Sur le capot
Rembobinage :	Manivelle	Position :	Sur le capot

Exposition

Cellule :	Au s ^{Ag} Cl ² Ag ⁺ onium	Position :	Sur la façade
Sensibilité :	10 Å 400 asa		

Obturateur

Marque de l'obturateur :	F. Deckel	Modèle de l'obturateur :	Compur
Type d'obturateur :	Central	Vitesses :	1/30 Å 1/500, B

Objectif

Type d'objectif :	Standard	Montage de l'objectif :	Fixe
Marque de l'objectif :	Argus	Modèle de l'objectif :	Cintar
Monture d'objectif :		Mode de map :	T ¹ l ¹ m ¹ trique coupl ¹ e
Focale :	50 mm	Ouverture maxi :	2,8


Divers

Type de pile :		Couleur du soufflet :	
Forme du soufflet :		Décentrement horizontal :	
Décentrement vertical :		Second viseur :	
Type de viseur :	T ¹ l ¹ m ¹ trique coupl ¹ e au viseur		

L'Autronic II est techniquement identique à l'Autronic I. Il n'en diffère que par des changements d'aspect.

www.collection-appareils.fr

www.collection-appareils.fr

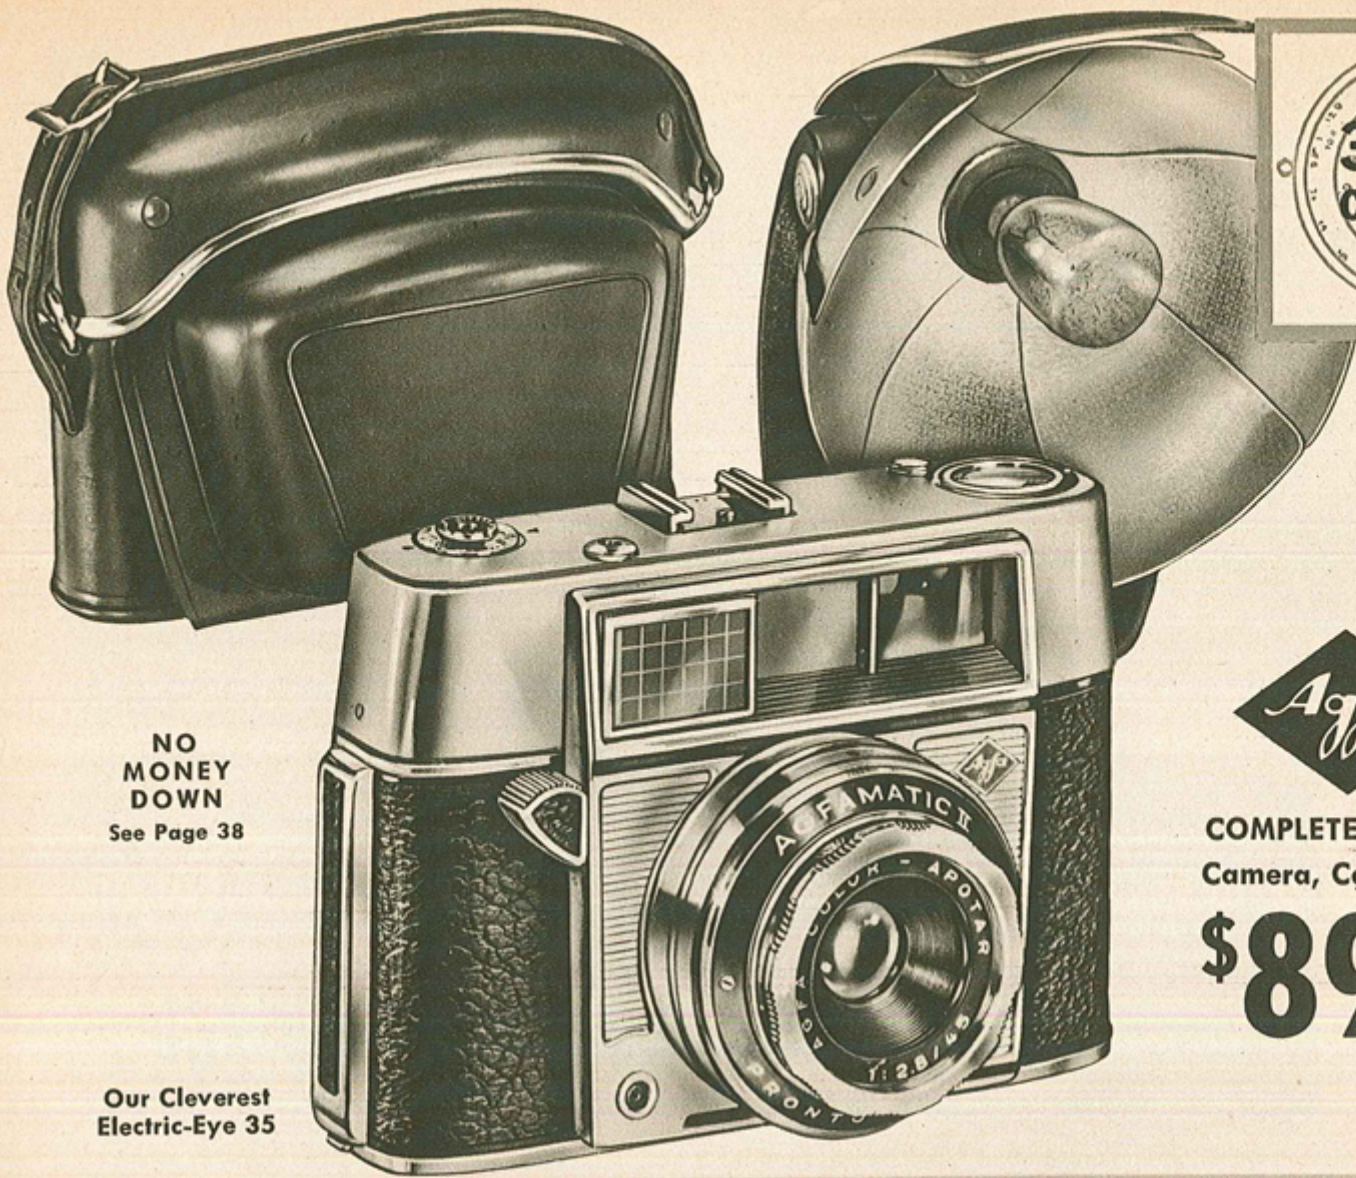

NO MONEY DOWN
See Page 38


Our Cleverest Electric-Eye 35



COMPLETE OUTFIT:
Camera, Case, Flash

\$89⁹⁴
Cash

A WARD Exclusive . . . Agfamatic II



STOP AND GO SIGNAL

Electric Eye Signals through viewfinder . . . GREEN when light is right, RED when light too dim for good shots.

- Finest f/2.8 Color-Apotar Lens
- Fully Focusing . . . Just "Dial" Subjects, "Close-up," "Group," "Scenes"
- Completely Automatic Exposures . . . Fullest Range Electric-Eye Control
- Stop-and-Go Signal in View Finder
- Shutter Speeds up to 1/250th . . . Automatically Selected as You Shoot
- Single-stroke Lever Film Advance

MOST REFINED ELECTRIC EYE 35mm WE SELL . . . Fully automatic, with an exceptionally wide range of picture-taking capabilities. Sets **best** shutter speed and lens opening. No settings, calculations or adjustments as you shoot.

Electric Eye sets exposure for you, the instant you shoot . . . always selects fastest possible shutter speed to assure sharpest possible pictures. Nothing for you to adjust once camera has been set for film speed (10 to 250 ASA).

Agfamatic II thinks for you, acts for you. It even warns when light is too dim (through stop-and-go signal). Oversize optical bright-line viewfinder. Color-Apotar 45mm lens accepts Series 6 accessories with adapter ring sold at right.


Simple Zonal Focusing near as 3½ feet—just "dial" to match your subject. "Close-up" (5 to 7½ ft.), "Group" (7½ to 15 ft.), "Scenes" (distances over 15 ft.).

Complete Outfit includes everything you need to shoot 2x2-inch color slide snapshots around the world.

Outfit: Agfamatic II era, deluxe leather case with strap, plus Color-Apotar Flashgun (for M-2 bulb) all genuine German-Agfa—plus long-life, battery. Ship. wt. 4 lbs. 67 R 575 L . . . Cash \$89.94

Ser. 6 Filter Adapter 67 R 2281—Wt. 2 oz. . . .

argus

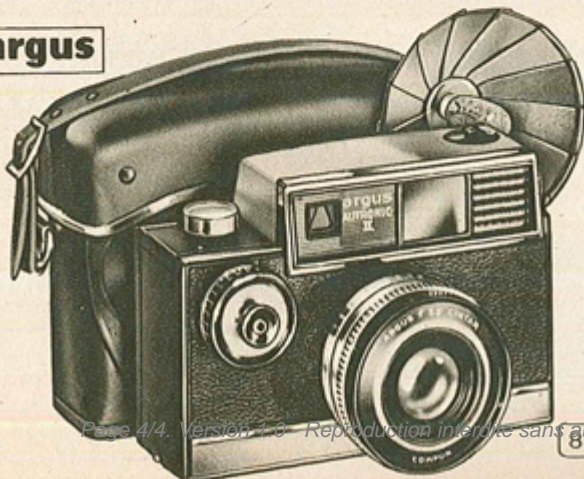

Automatic "Autronic II" 35mm Outfit

\$104⁹⁷
OUTFIT

- Electric-Eye Automatic Exposure Control
- Compur Shutter Speeds Up To 1/500th S
- Coupled Rangefinder for Focusing E
- Fast f/2.8 Cintar Lens . . . Famous Qual

AUTRONIC II by Argus . . . World leader in 35mm color-slide photography. Frameline finder shows your subject coverage brilliantly, precisely. Signal warns when light is too dim for good pictures.

Electric-Eye controls exposure as you shoot, yet lets you select shutter speeds you prefer. Fully automatic ease, plus full manual control. Cintar lens is threaded to accept Ser. 5 filters—order Retaining Ring below to hold filters in place.

Coupled Optical Rangefinder assures precise focus with fingertip ease. Full M-X flash chronization at all shutter speeds. Argus flashgun folds compactly—opens except both type "M" and No. 25 bulbs.

Outfit. Camera, leather Case, Flashgun, one B-C battery 67R3227 on Page 17.

67 R 540 L—Ship. wt. 5 lbs. . . . Cash \$104.97

67 R 2251 X—Retaining Ring. Holds Ser. 5 Filters (not incl.) in place. Wt. 4 oz. . . .